
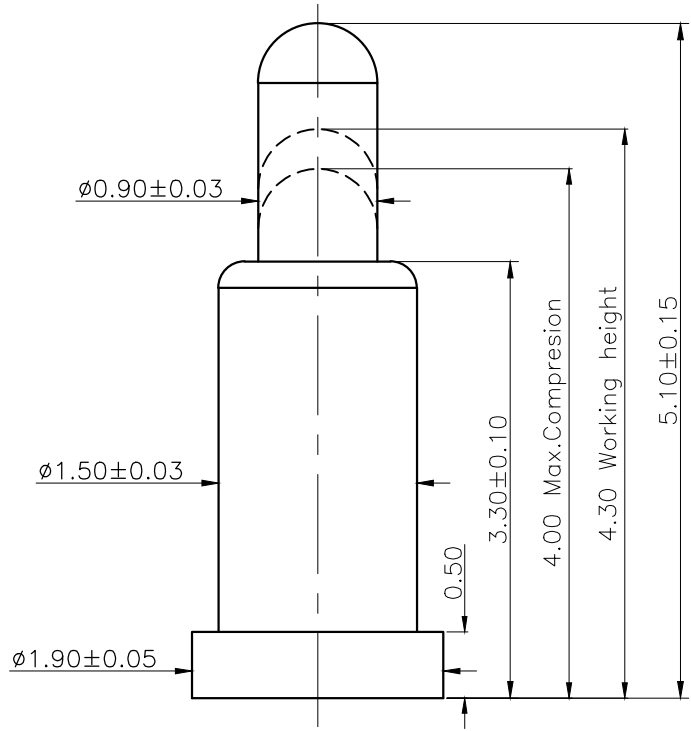


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	Brass	Au 10u" Min. OVER 60~120 U" Min. NI
2	Barrel	1	Brass	Au 10u" Min. OVER 60~120 U" Min. NI
3	Spring	1	SUS 304	Au 1u" Min. OVER NI
4	Cap	1	High temp.Plastic; UL94 V-0	Color Black

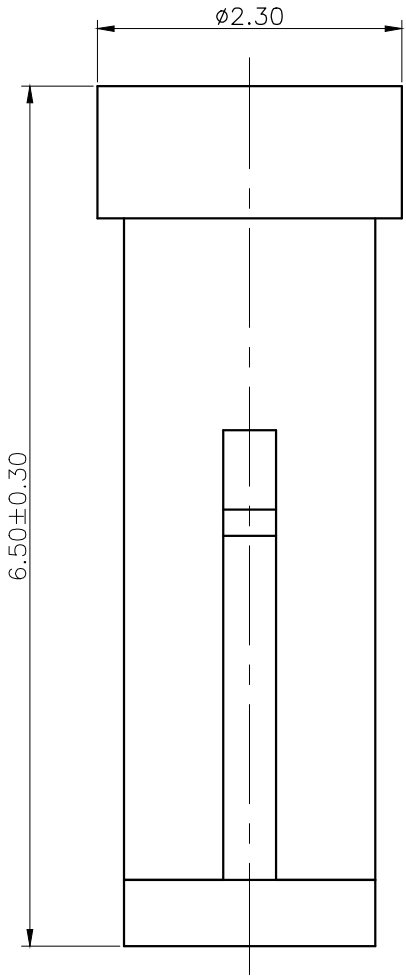

- NOTES:
- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1A
 - .Contact Resistance: 100 mohm maximum at Working Height(Quiescence)
 - Mechanical
 - .Full store: 1.10 mm
 - .Spring Force : 50g±10g at Working Height
 - .Durability:10,000 cycles(minimum)
 - Environmental
 - .Operating Temperature: -30°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - When the current is greater than 1A then need to increase the time delay circuit(3 second)
 - To avoid arcing issue, The adaptor start to power supply after connector mated fully.
 - To ensure the best usage,please operate it based on the working height.
 - .RoHS&HF compliant product.

DRAWN	LX	DATE	2021.03.13		
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	CE-2078B		Ang:
PROJECT		DRAWING NO.	NC2952-01RA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim:
					0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE