


Please Approve this Drawing

Date



Signature

N0.	Part Name	Q'TY	Material	Plated surface
1	Pin	7	Brass	Au 3u" Min. Over 50u" Min. Ni
2	Housing	1	HTN+30%GF	UL94 V-0 Color Black
3				
4				
5				

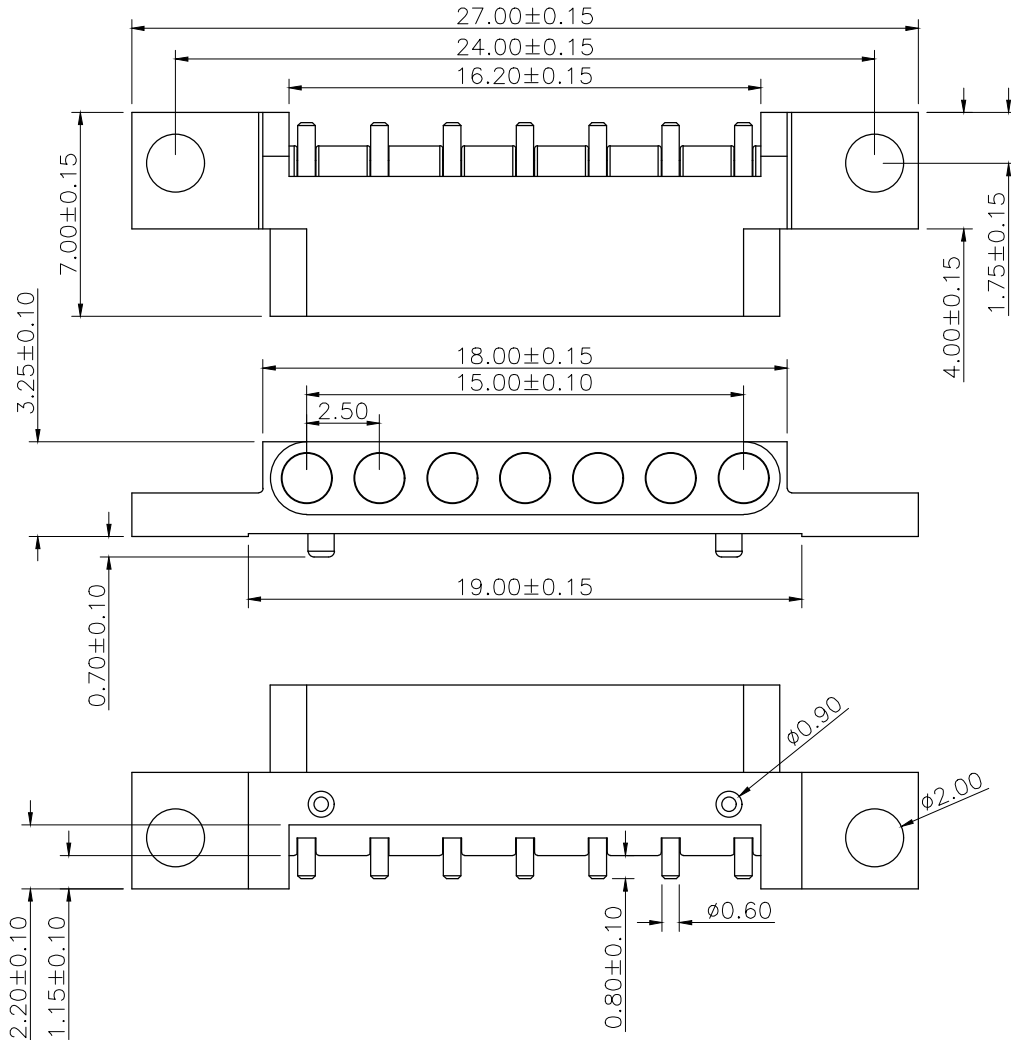

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 2.0A
 - .Contact Resistance:50 mohm maximum at Working Height(Quiescence)
 - .Insulation Resistance: 1000MΩ Min. at 1000VDC/Minute
 - .Dielectric Withstanding Voltage: At 500VAC/Minute No Breakdown
- Environmental
 - .Operating Temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- RoHs&HF compliant product.

DRAWN	lys	DATE	2022.01.12			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	A.0	
APPROVED		TITLE	pogo pin connector.			Ang:
PROJECT		DRAWING NO.	NF4347-07PA			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						0 ±0.20
						.0 ±0.15
						.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE