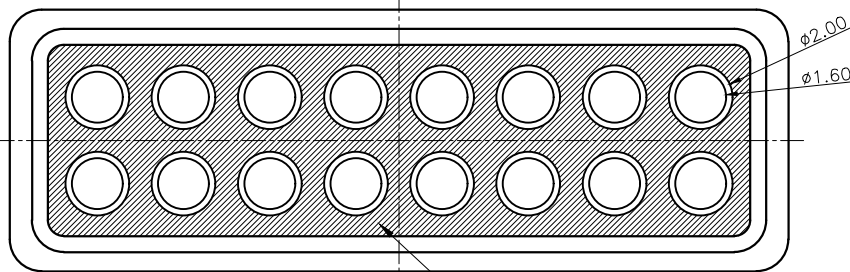

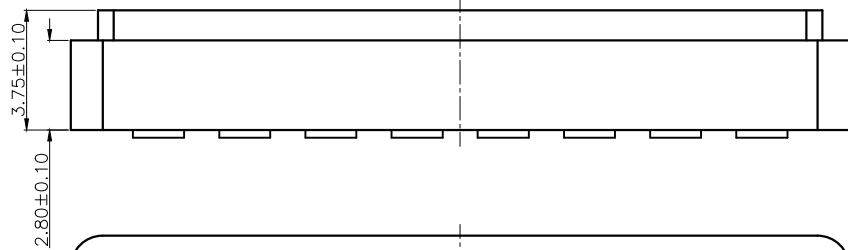
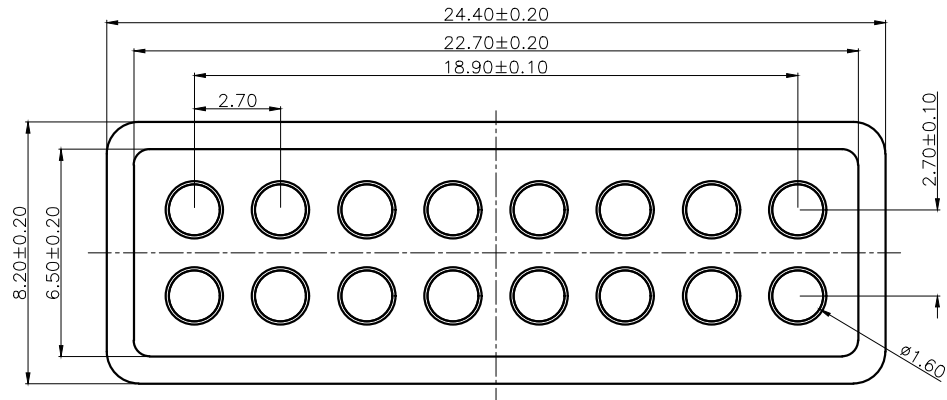


Please Approve this Drawing

Date	
Signature	


NO.	Part Name	Q'TY	Material	Plated surface
1	Pin	16	HBI59	AU 10 U" MIN OVER 50~120 U" NI
2	Housing	1	High temp.Plastic; UL94 V-0	Color Black
3				
4				





Waterproof Glue

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance: 50 mohm
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - .Dustproof and waterproof: IP68
- .RoHs&HF compliant product.

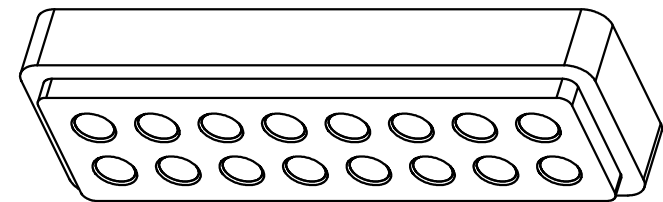

DRAWN	Lx	DATE	2022.03.11		 Dongguan Promax Electronics Technology Co., Ltd	
CHECKED	Lys	SCALE	10:1	VER. A.0		
APPROVED	Tonny	TITLE	pin connector.		Ang:	
PROJECT		DRAWING NO.	NF4519-16PA		0 ±1°	0 ±0.15
SHEET	1 of 1	UNIT	mm		.0 ±0.5°	.0 ±0.10
					.00 ±0.25°	.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE
A.0	NEW RELEASE		