


Please Approve this Drawing

Date



Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger1	1	C3604	AU 5U" MIN OVER 50~100 U" NI
2	Plunger2	1	C3604	AU 5U" MIN OVER 50~100 U" NI
3	Barrel	1	C3604	AU 5 U" MIN OVER 50~100 U" NI
4	Spring	1	SUS304	Gold Plated

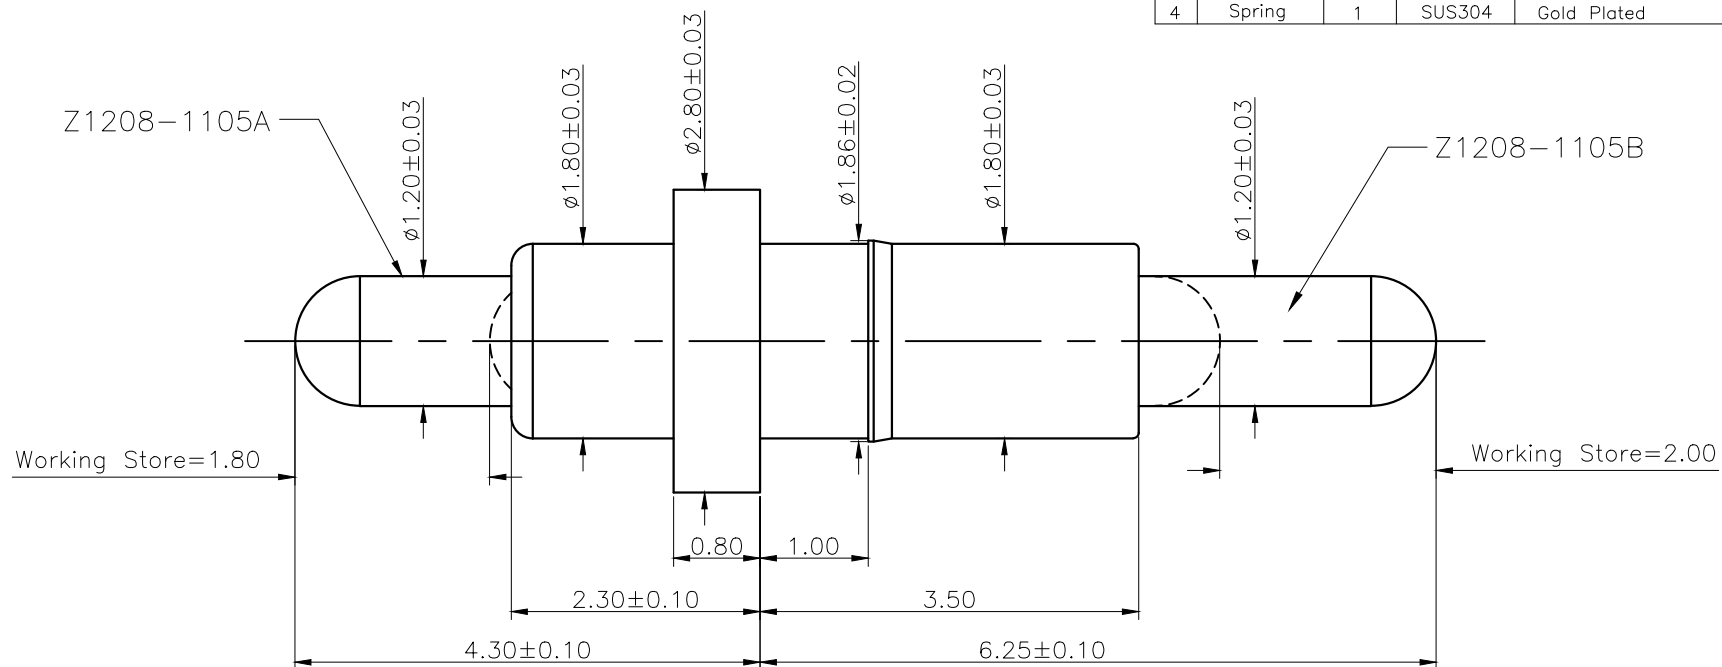

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1A Max.
 - .Contact Resistance:100 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Spring Force :70gf±15gf at Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	Tony	DATE	2019.05.23			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	Pogo pin T51			Ang:
PROJECT		DRAWING NO.	C1208-01A			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						Dim: 0 ±0.15
						.0 ±0.10
						.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE