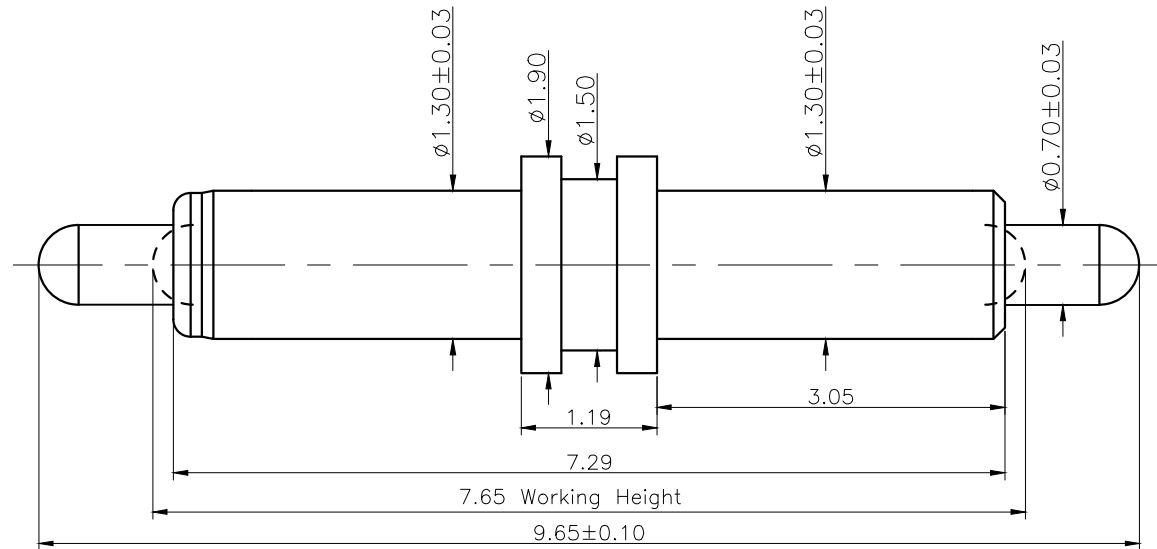




NO.	Part Number	Part Name	Version	Q'TY	Material	Plated surface
1	Z2367-0102A	Plunger	B.0	1	C3604	AU 2 U" MIN OVER 60~120 U" NI
2	K2367-1102A	Barrel	B.0	1	C3604	AU 2 U" MIN OVER 60~120 U" NI
3	T2367-1A	Spring	B.0	1	SUS 304	/
4						
5						



NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance: 30 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 2.20 mm
 - .Spring Force : 70g±15g at Working Height
 - .Durability:3,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	tony	DATE	2020.10.10			 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER.	B.0	
APPROVED		TITLE	pogo pin			Ang:
PROJECT		DRAWING NO.	C2367-01			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						0 ±0.15
						.0 ±0.10
						.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE