
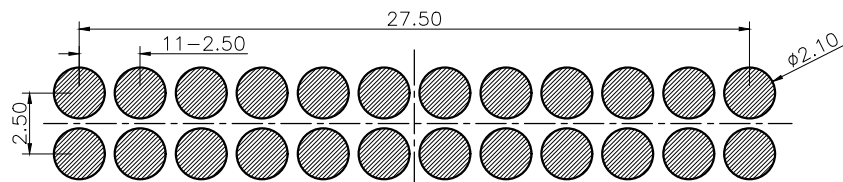
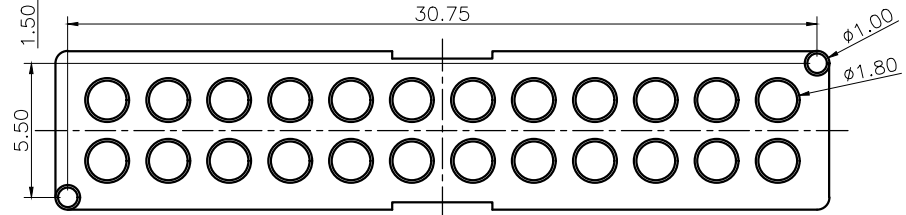
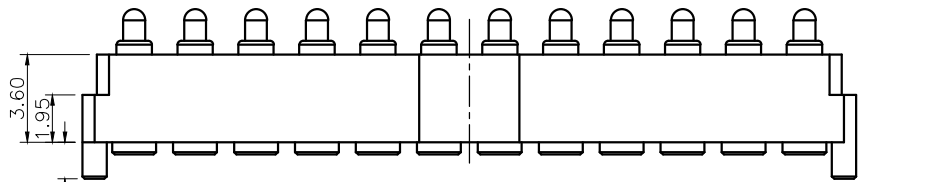




Please Approve this Drawing

Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	24	HBI59	Au 5u" Min. OVER 50U~120" Ni
2	Barrel	24	HBI59	Au 3u" Min. OVER 50U~120" Ni
3	Spring	24	SUS304	/
4	Housing&Cap	1	High temp.Plastic; UL94 V-0	Color Black

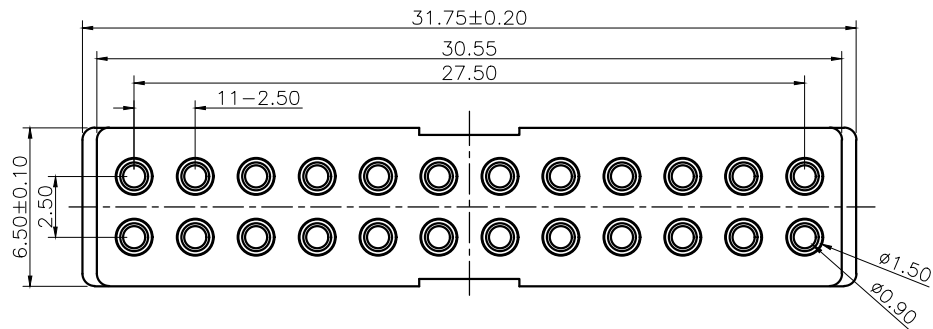



Recommended pcb layout
Layout tolerance: ±0.05mm

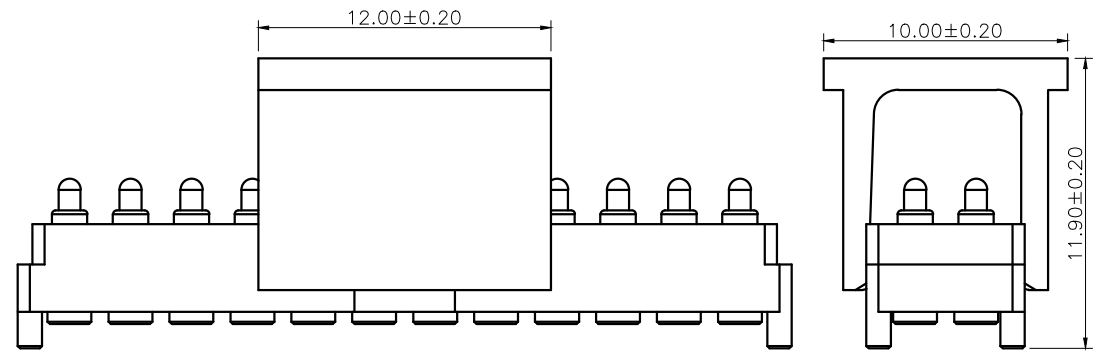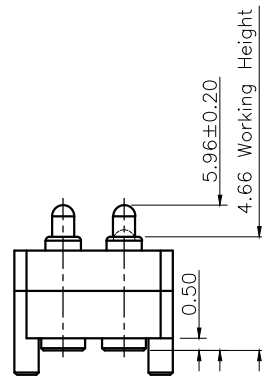

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A Max.
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.30 mm
 - .Spring Force : 100g±20%g at Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHS&HF compliant product.

VER.	DESCRIPTION	ECN NO.	DATE

DRAWN	Lys	DATE	2021.07.09		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. A.0	
APPROVED		TITLE	pogo pin		Ang:
PROJECT		DRAWING NO.	NC3552-24RA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim:
					0 ±0.25
					.0 ±0.15
					.00 ±0.10