


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	2	无铅铜HBI59	AU 5 U" MIN OVER 50~120 U" NI
2	Barrel	1	无铅铜HBI59	AU 5 U" MIN OVER 50~120 U" NI
3	Spring	1	SUS304	N/A

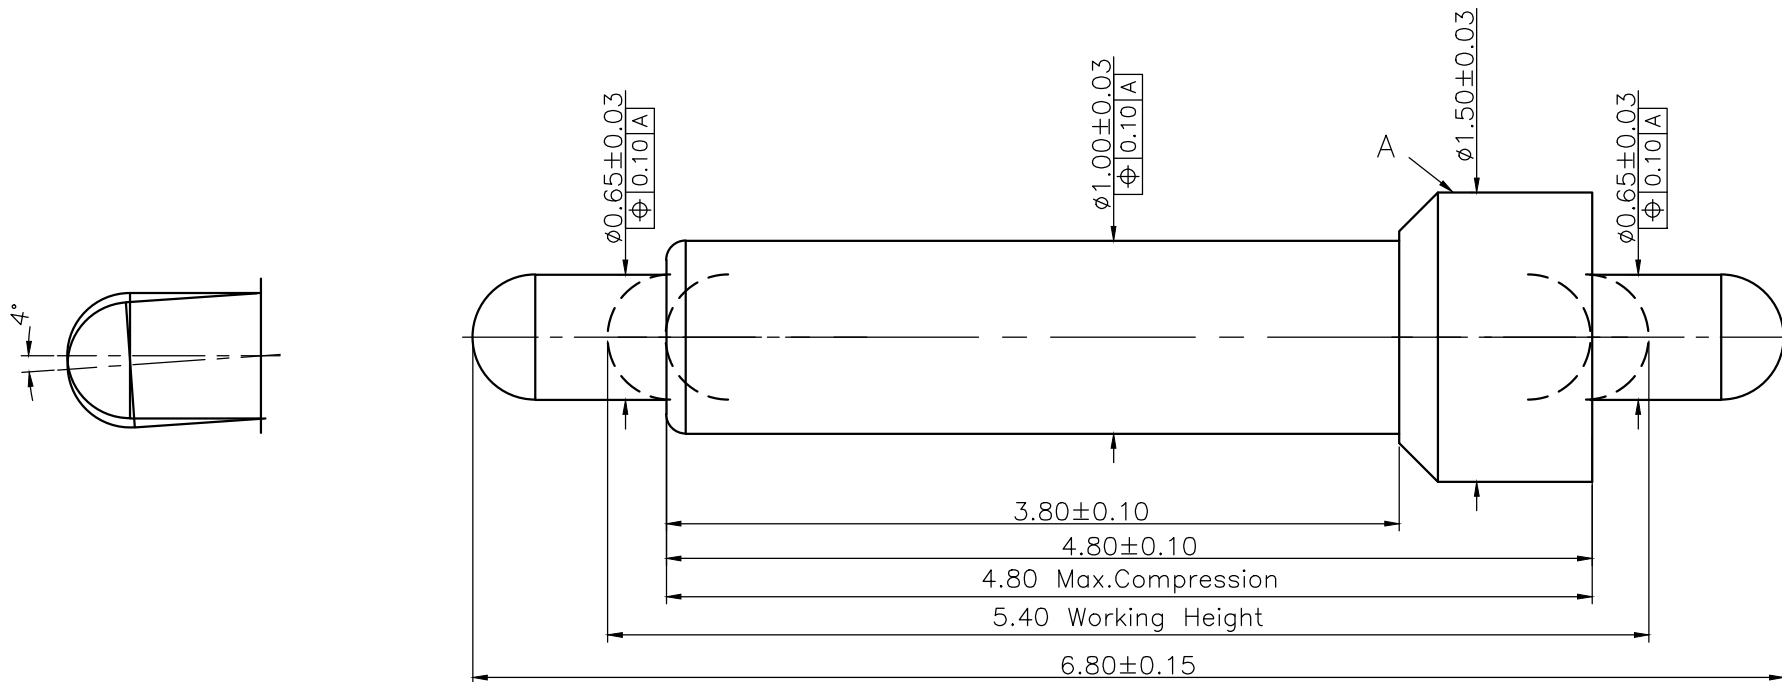

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 5.2 V ; 1.0A Max.
 - .Contact Resistance: 100 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 2.00 mm
 - .Working Store: 1.40 mm
 - .Spring Force: 40gf±20%gf at Normal Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - .High temperature resistance: 260° C. 3 minutes.
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	ZYH	DATE	2022.06.28				Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1	VER.	A.0			
APPROVED		TITLE	pogo pin			Ang:	Dim:	
PROJECT		DRAWING NO.	NC4848-01PA			0 ±1°	0 ±0.15	
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.10	
					.00 ±0.25°	.00 ±0.05		

VER.	DESCRIPTION	ECN NO.	DATE