
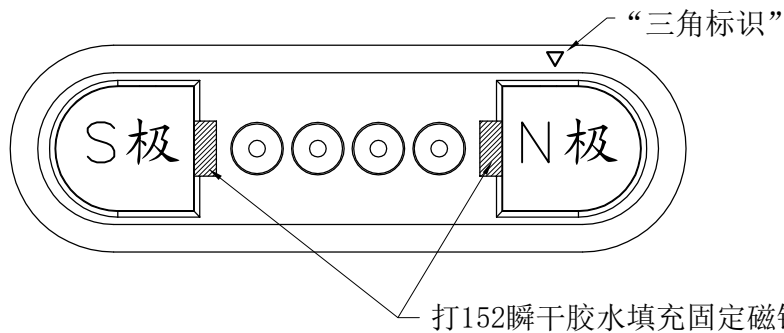
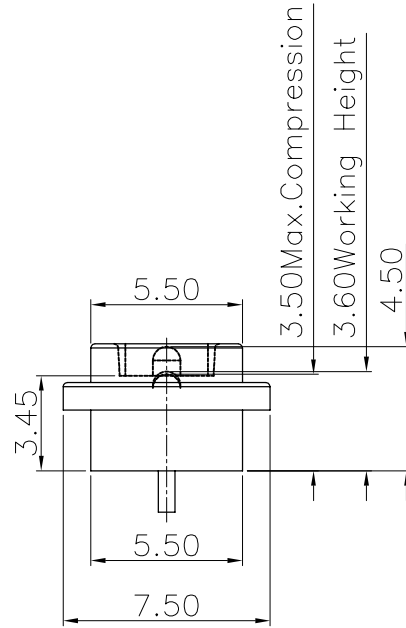
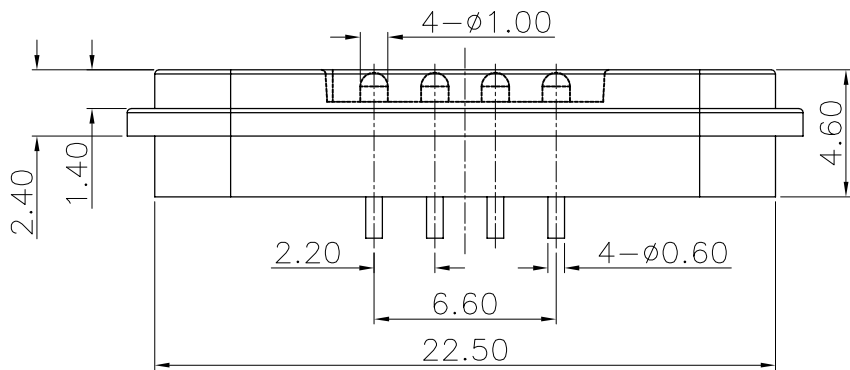


Please Approve this Drawing

Date


Signature

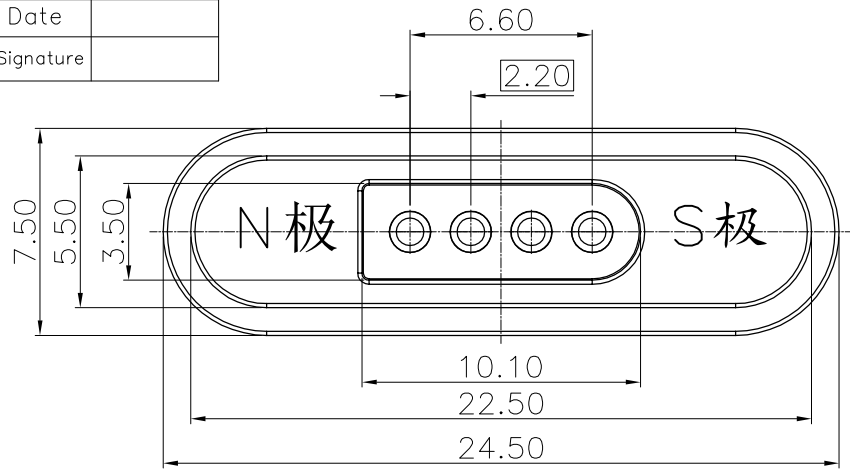

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	4	HBI59	Au 5u" Min. Over 50u" Min. Ni
2	Barrel	4	HBI59	Au 5u" Min. Over 50u" Min. Ni
3	Spring	4	SUS304	/
4	Magnet	2	NdFeB N52	Plating Ni
5	Housing	1	High temp.Plastic; UL94 V-0	Color Black

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A Max.
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.05 mm
 - .Working Store: 1.00 mm
 - .Spring Force: 80gf±20gf at Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

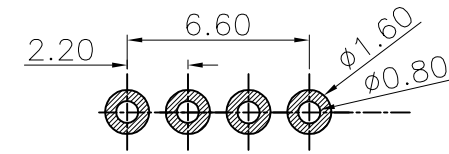

RECOMMEND PCB LAYOUT(TOP VIEW)
TOLERANCE ±0.05mm

DRAWN	Devin	DATE	2022.06.29		Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. A.0	
APPROVED		TITLE	pogo pin connector.		Ang:
PROJECT		DRAWING NO.	NC4857-04PA		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.20
					.0 ±0.15
					.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE