
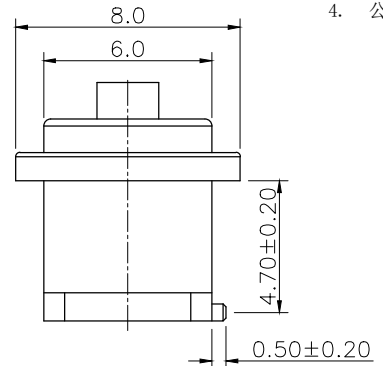


Please Approve this Drawing


Date

Signature

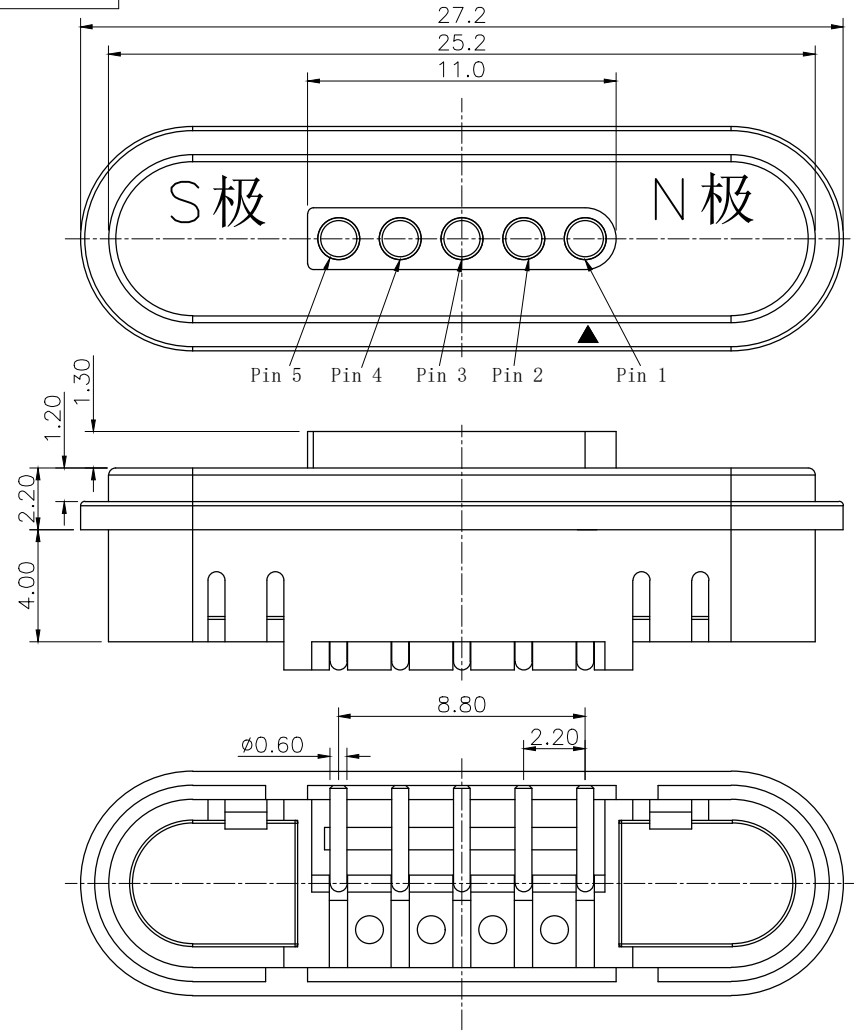

N0.	Part Name	Q'TY	Material	Plated surface
1	Pin	5	Brass	Au 5u" Min. Over 50u" Min. Ni
2	Housing	1	High temp.Plastic; UL94 V-0 Color Black	
3	Magnet	2	NdFeB N35	Plating Ni
4				
5				

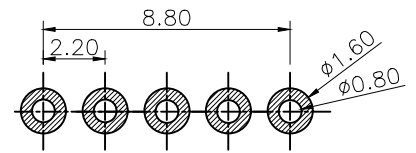

- NOTES:
- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance:50 mohm maximum at Working Height(Quiescence)
 - .Insulation Resistance: 1000MΩ Min. at 1000VDC/Minute
 - .Dielectric Withstanding Voltage: At 500VAC/Minute No Breakdown
 - Environmental
 - .Operating Temperature: -20°C~+80°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - RoHs&HF compliant product.
 - 公母配对公差±0.15



Recommended pcb layout
Layout tolerance: ±0.05mm

DRAWN	lys	DATE	2020.10.16		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	pin connector.		Ang:
PROJECT		DRAWING NO.	NF2347-05B		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.20
					.0 ±0.15
					.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE