


Please Approve this Drawing


Date

Signature


NO.	Part Name	Q'TY	Material	Plated surface
1	Pin	2	无铅铜	Au 10u" Min. Over 50u" Min. Ni
2	Housing	1	High temp.Plastic; UL94 V-0 Color Black	
3	Magnet	1	NdFeB	Plating Ni
4				
5				

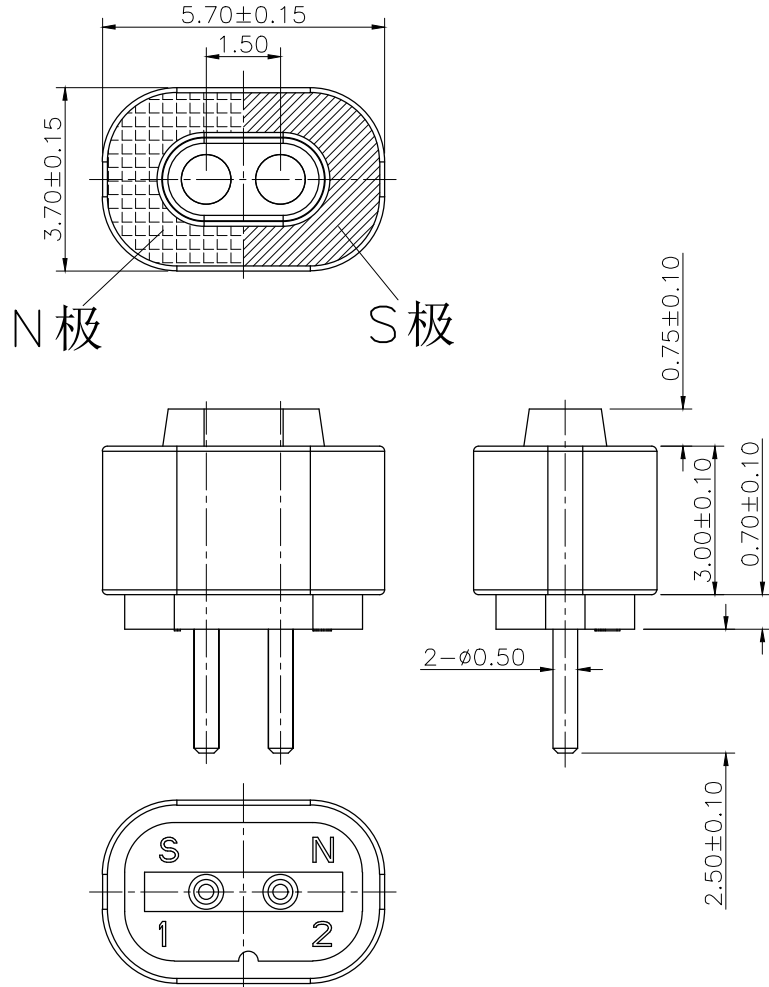

- NOTES:
- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance:30 mohm maximum at Working Height(Quiescence)
 - Environmental
 - .Operating Temperature: -25°C~+80°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
 - RoHS&HF compliant product.

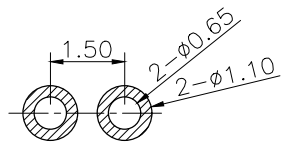

Recommended pcb layout
Layout tolerance: ±0.05mm



VER.	DESCRIPTION	ECN NO.	DATE

DRAWN	lys	DATE	2023.02.27		Dongguan Promax Electronics Technology Co., Ltd.	
CHECKED		SCALE	10:1	VER. B.0		
APPROVED		TITLE	pin connector.		Ang:	
PROJECT		DRAWING NO.	NF5719-02PB		0 ±1°	0 ±0.20
SHEET	1 of 1	UNIT	mm		.0 ±0.5°	.0 ±0.15
					.00 ±0.25°	.00 ±0.10