
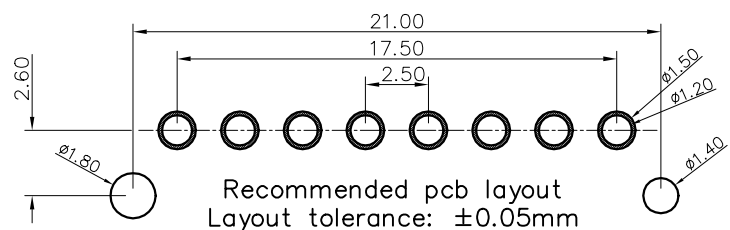
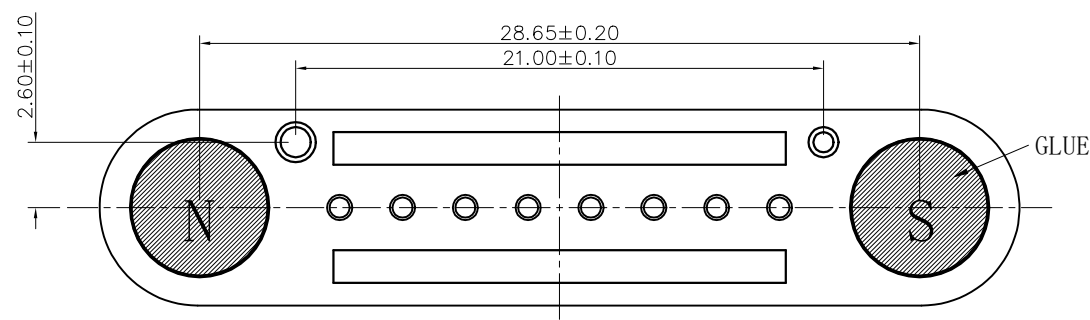
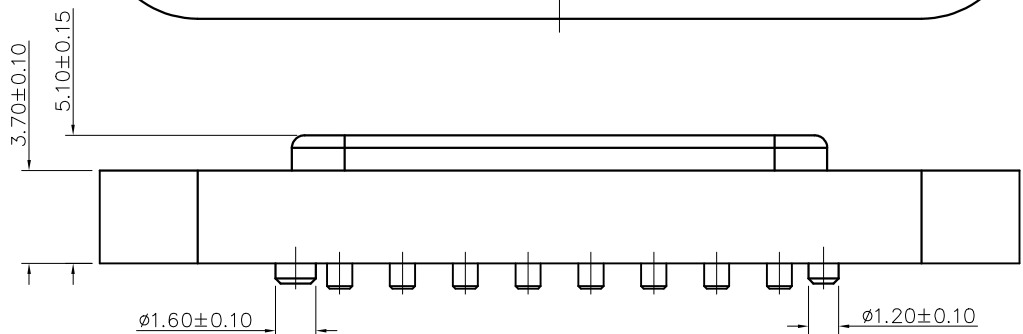


Please Approve this Drawing



Date

Signature

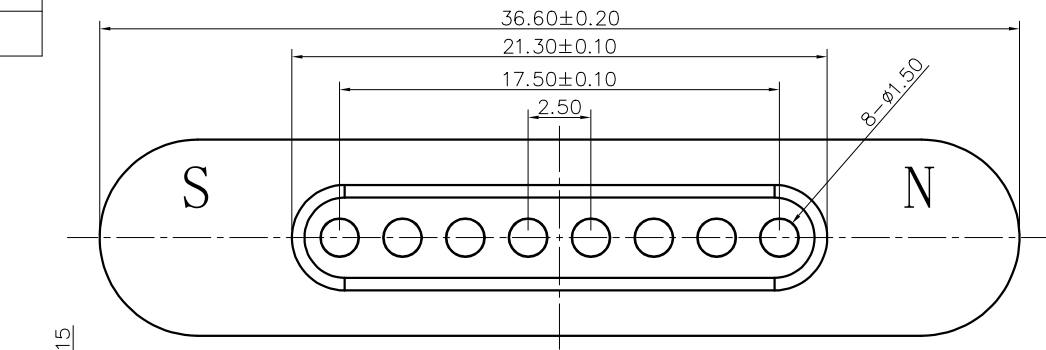

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	8	无铅铜	AU 10U" MIN OVER 50~120 U" NI
2	Magnet	2	NdFeB N52	Plating Ni
3	Housing	1	High temp.Plastic; UL94 V-0	Color Black

- NOTES:
- Electrical
 - .Rated Current & Voltage : DC 12 V ; 4.0A Max.
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
 - Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: PIN: 72 Hours Magnet: 48 Hours
 - .RoHS&HF compliant product.

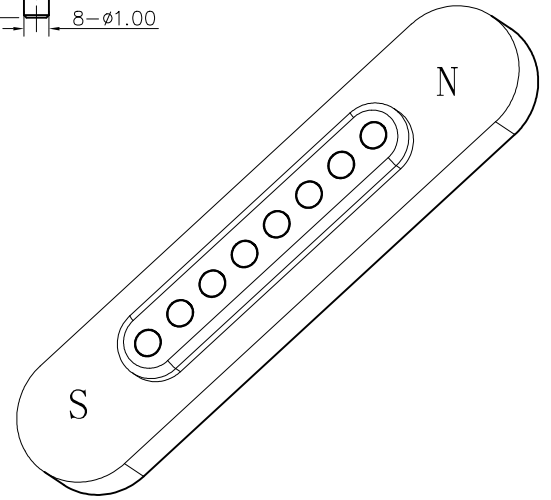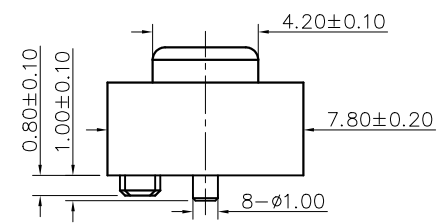

DRAWN	Eddie	DATE	2023.09.07			Dongguan Promax Electronics Technology Co., Ltd.	
CHECKED		SCALE	10:1	VER.	A.0		
APPROVED		TITLE	Pin connector			Ang:	
PROJECT		DRAWING NO.	NF6047-08PA			0 ±1°	0 ±0.20
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.15
						.00 ±0.25°	.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE