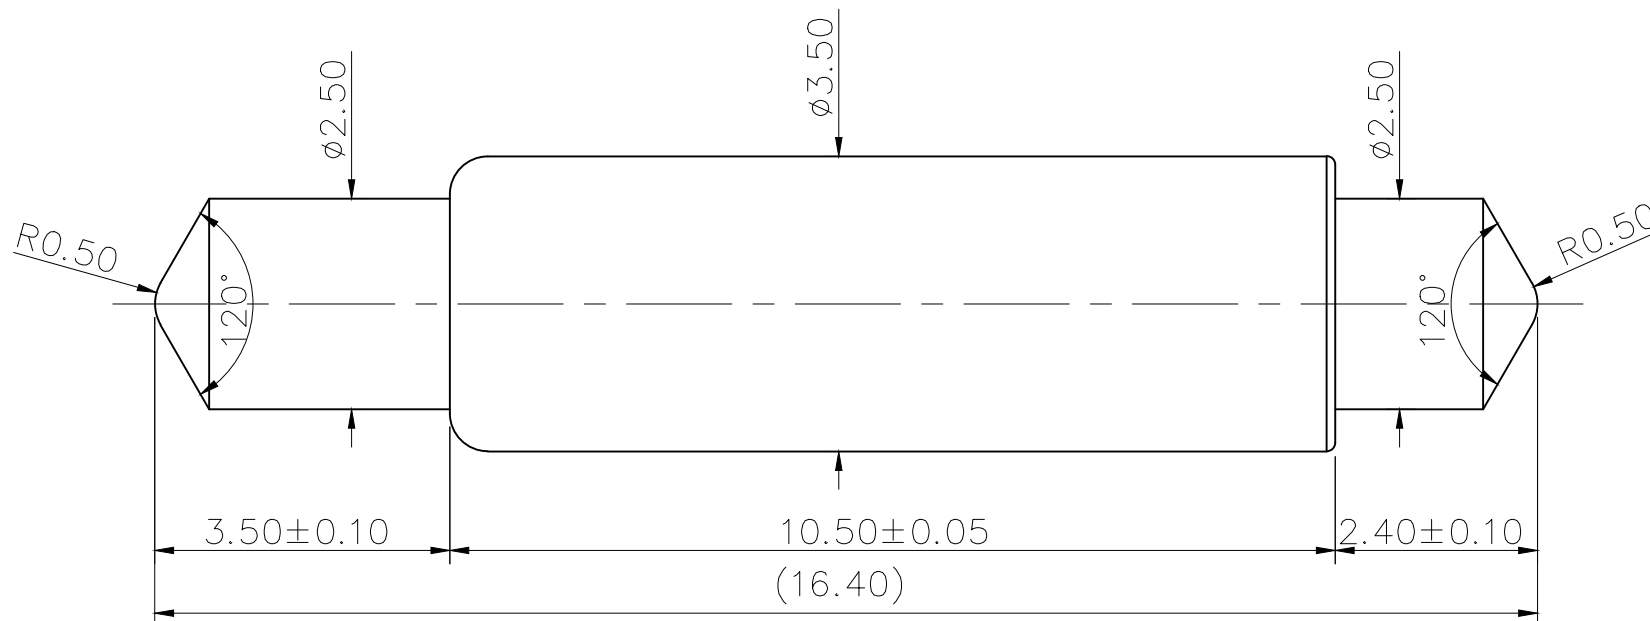


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Top Plunger	1	Brass	Au 20u" Min.
2	Bottom Plunger	1	Brass	Au 20u" Min.
3	Barrel	1	Brass	Au 10u" Min.
4	Spring	1	SUS	N/A





Top Plunger

Bottom Plunger

NOTES:

- Electrical
  - .Rated Current & Voltage : DC 12 V ; 1.0A
  - .Contact Resistance: 100 mohm maximum at Working Store(Quiescence)
- Mechanical
  - .Full store: 4.50 mm
  - .Working Store: 4.00 mm
  - .Spring Force:  $110 \pm 20\%$ gf at Working Height
  - .Durability: 10,000 cycles(minimum)
- .RoHs&HF compliant product.

DRAWN		DATE	2019.10.25			 Dongguan Promax Electronics Technology Co., Ltd	
CHECKED		SCALE	10:1	VER.	B.0		
APPROVED		TITLE	Probes			Ang:	Dim:
PROJECT		DRAWING NO.	JB350B1640B-01			0 ±1°	0 ±0.15
SHEET	1 of 1	UNIT	mm			.0 ±0.5°	.0 ±0.10
					.00 ±0.25°	.00 ±0.05	

VER.	DESCRIPTION	ECN NO.	DATE