


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Top Plunger	1	BeCu	Gold Plated
2	Bottom Plunger	1	BeCu	Gold Plated
3	Barrel	1	PhBz	Gold Plated
4	Spring	1	SWP	Gold Plated

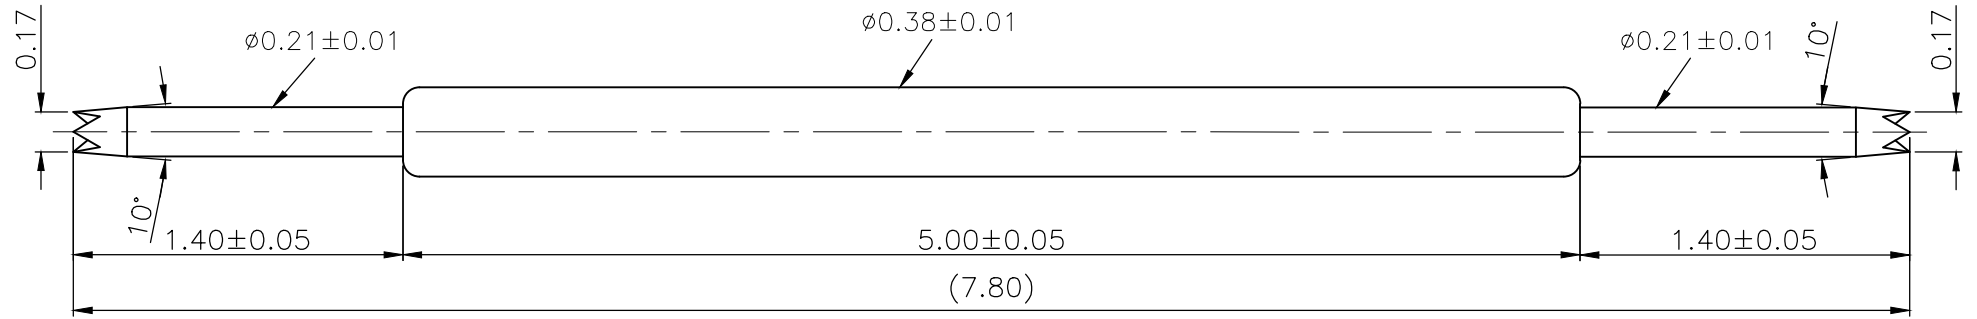

Bottom Plunger()

Top Plunger()

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A MAX
 - .Contact Resistance:100 mohm maximum at Recommended Travel(Quiescence)
- Mechanical
 - .Full Travel: 1.20mm
 - .Recommended Travel: 1.00mm
 - .Spring Force: 35gf±20%gf at Recommended Travel
 - .Durability:100,000 cycles(minimum)
- .RoHs&HF compliant product.

DRAWN		DATE	2020.09.23			Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	4:1	VER.	B.0	
APPROVED		TITLE	Probes			Ang:
PROJECT		DRAWING NO.	JD-SX038-115			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						Dim:
						0 ±0.15
						.0 ±0.10
						.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE