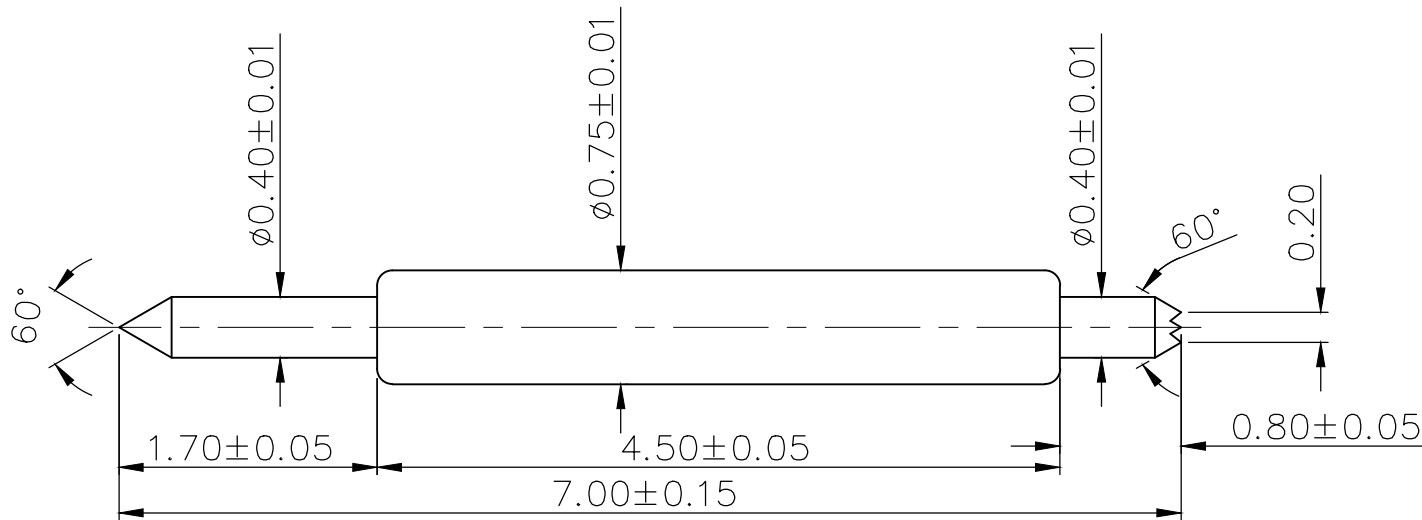


Please Approve this Drawing

Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Top Plunger	1	BeCu	Au 80u" Min.
2	Bottom Plunger	1	BeCu	Au 80u" Min.
3	Barrel	1	PhBz	Au 20u" Min.
4	Spring	1	SWP	Au 3u" Min.





Top Plunger

Bottom Plunger

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance: 100 mohm maximum at Working Store(Quiescence)
- Mechanical
 - .Full store: 1.60 mm
 - .Working Store: 1.00 mm
 - .Spring Force: $41 \pm 20\%$ gf at Working Height
 - .Durability: 100,000 cycles(minimum)
- .RoHs&HF compliant product.

DRAWN		DATE	2019.10.25		 Dongguan Promax Electronics Technology Co., Ltd
CHECKED		SCALE	10:1	VER. B.0	
APPROVED		TITLE	Probes		Ang:
PROJECT		DRAWING NO.	JB075B700F-01		0 ±1°
SHEET	1 of 1	UNIT	mm		.0 ±0.5°
					.00 ±0.25°
					Dim: 0 ±0.15
					.0 ±0.10
					.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE