

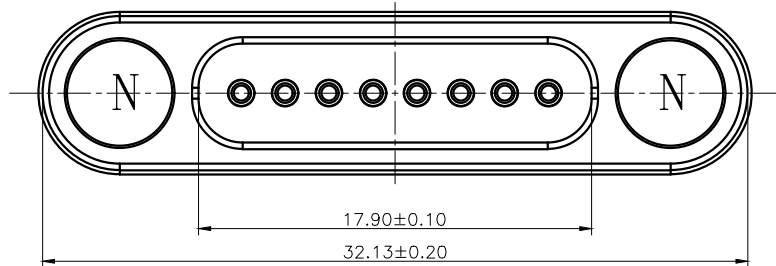
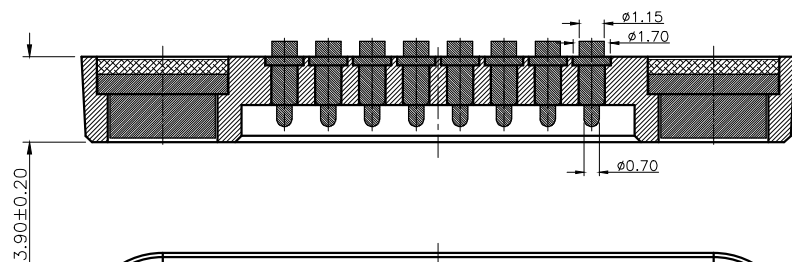


Please Approve this Drawing



Date

Signature

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	8	无铅铜	AU 10U" MIN OVER 50~120 U" NI
2	Barrel	8	无铅铜	AU 10U" MIN OVER 50~120 U" NI
3	Spring	8	SUS304	N/A
4	Magnet	2	NdFeB N52	Plating Ni
5	Housing	1	High temp.Plastic; UL94 V-0	Color Black

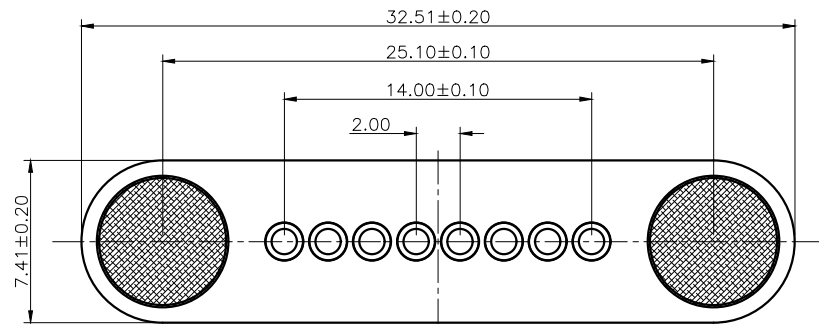




Recommended pcb layout
Layout tolerance: ±0.05mm

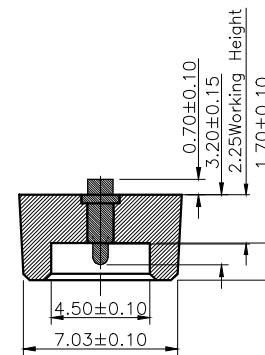

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Full store: 1.00 mm
 - .Spring Force: 35gf±10gf at Working Height
 - .Durability:10,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: PIN:72 Hours Magnet: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHS&HF compliant product.

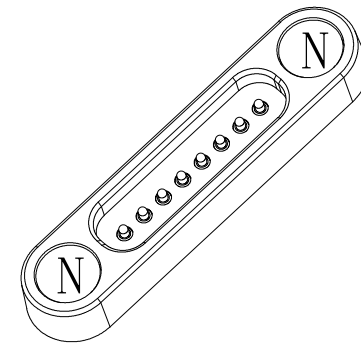

DRAWN	Eddie	DATE	2023.02.04			 Dongguan Promax Electronics Technology Co., Ltd.
CHECKED		SCALE	10:1	VER.	A.0	
APPROVED		TITLE	pogo pin connector.			Ang:
PROJECT		DRAWING NO.	NC5648-08PA			0 ±1°
SHEET	1 of 1	UNIT	mm			.0 ±0.5°
						.00 ±0.25°
						Dim: 0 ±0.20
						.0 ±0.15
						.00 ±0.10

VER.	DESCRIPTION	ECN NO.	DATE